





Adjustable Focus Downlight


Instruction manual



What's in the Box



Dimensions (unit: inch)

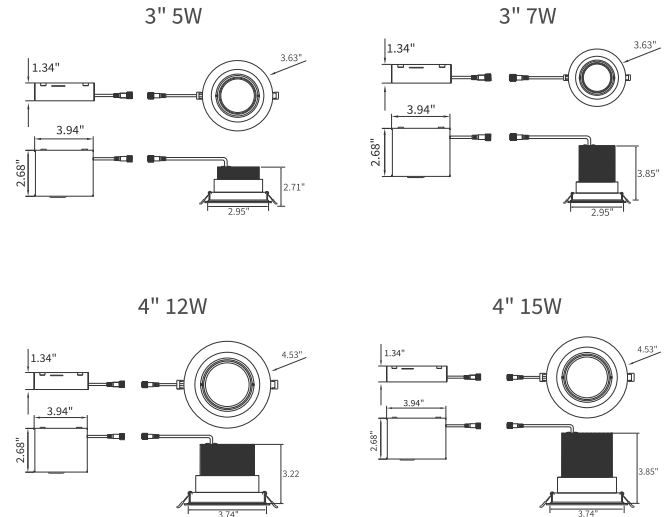

Safety Information


To reduce the risk of fire, electric shock, or physical injury:

- Turn off circuit breaker before installing this fixture.
- This product should be installed by a person familiar with the construction and operation of the product the hazards involved. Safety eyeglasses and gloves are recommended.
- Abide by related regional and local laws or regulations.
- Proper grounding is required to ensure safety.
- Do not alter, relocate, or remove wiring during installation.
- Do not make or alter any open holes in wiring enclosure or electrical components during installation.
- Check for shipping damage before installing. If the product is damaged, do not use it.
- Keep fixture away from corrosive substances
- Suitable for damp locations at temperature ranging from -4°F to 113°F. Not for use where directly exposed to water.
- Clean the fixture regularly to ensure proper operation. Do not clean with harsh solvents.
- Use safety precautions and abide by regional and local laws or regulations.
- This product is not compatible with 3rd party sensors.
- This product is not compatible with photo controls.
- This product is not compatible with occupancy sensors.
- This product is not compatible with timing devices.


Specifications

Model	Wattage	Lumens	Cutout Size	Beam Angle	CRI	Voltage	Dimmable	CCT	Average Lifetime
DC13005-WH	5W	400-450lm	2.95in	15°-60°	80+	AC100-130V 50/60Hz	Yes	2700K 3000K 3500K 4000K 5000K 6000K	50,000H
DC13007-WH	7W	500-600lm	2.95in						
DC13012-WH	12W	850-1000lm	3.74in						
DC13015-WH	15W	1100-1300lm	3.74in						


Installation drawing




- Turn off circuit breaker before installation.
- Cut ceiling hole using Installation Template (C) as a guide.




- Open Junction Box (B) and remove appropriate knockout.




- Thread cable connector through J-Box knockout, secure wires with screws, then connect cable connector on opposite side.
- Connect supply wires with junction wires using wire nuts (D): Black to Black (Live) / White to White (Neutral) / Bare Copper to Bare Copper (Ground)
- Tuck connected wires inside junction box and close the cover.



- Slide CCT switch to select desired color temperature.
 - Insert junction box through ceiling hole.
- New Construction: Secure to studs, joists, or similar fixed structural units.
Remodel: Do not require to secure to studs, joists, or similar fixed units.



- Attach fixture to junction box using connector (1).
- Tighten connector by hand (2).



- Adjust the light angle by rotating the lamp head. 15°-60° adjustable focus and tilts 30°.
- Raise spring clips to insert the luminaire in the ceiling opening.
- Turn on circuit breaker & test the light.